


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

C

PART NUMBER	SINGLE / MULTICORE CABLE DIAMETER RANGE MIN / MAX INCH [mm]	TREFOIL CABLE DIAMETER RANGE MIN / MAX INCH [mm]	QUADRAFOIL CABLE DIAMETER RANGE MIN / MAX INCH [mm]	DIM "A" INCH [mm]	WEIGHT LB [g]
CSB42-150-230-Q	1.38/2.75 [35/70]	0.71/1.26 [18/32]	0.63/1.14 [16/29]	10.8 [274]	.10 [44]
CSB42-230-330-Q	2.75/3.94 [70/100]	1.26/1.97 [32/50]	1.14/1.73 [29/44]	14.8 [376]	.12 [56]
CSB42-330-430-Q	3.94/5.12 [100/130]	1.97/2.75 [50/70]	1.73/2.28 [44/58]	18.8 [478]	.15 [68]

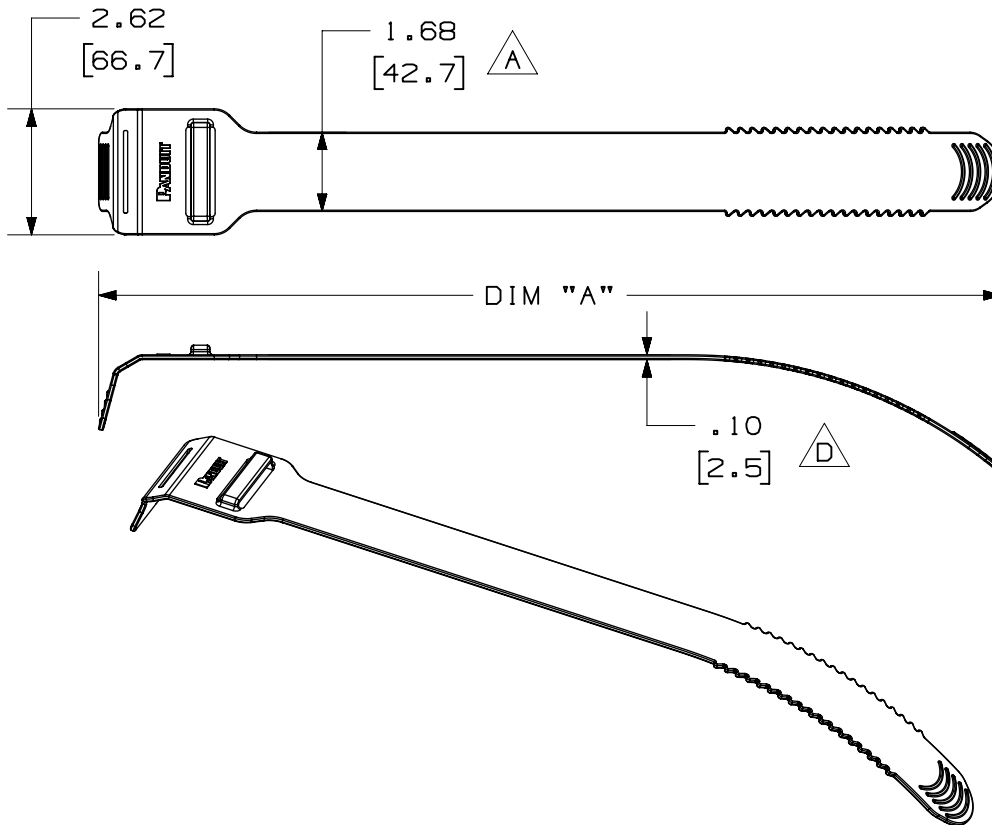

NOTES:

- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- DIMENSIONS IN [] ARE METRIC.
- ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

PART NUMBER		NOTED IN TABLE		
TITLE				
Individual Cushion Sleeve CSB42				
CUSTOMER DRAWING				
ITEM REVISION NAME		00566NFA/05		
DATASET FILE NAME		00566NFA_DC/05B		
MATERIAL		LOW SMOKE HALOGEN FREE TPU/TPE		
DRAWING NUMBER		00566NFA-DC		
DRAWN BY	DATE	CHK	SCALE	SIZE
MGKR	04-06-2020	BEV	NONE	A
SHEET 1 OF 1				

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
05B	12-01-21	JBN	RGR0	JADE	C. REMOVED MIN/MAX EFFECTIVE LENGTH D. ADDED PART THICKNESS B. ADDED CABLE CONFIGURATION DIAMETER RANGE MIN/MAX	093876 r02
05A	02-04-21	JBN	RGR0	ADAH	A. REVISED DIM. TO 1.68 WAS 1.65	093876 r01
04A	01-08-21	JBN	RGR0	ADAH	RELEASED TO PRODUCTION	093876 r00
00A	04-06-20	MGKR	RGR0	BEV	INITIAL RELEASE	

2

1

A-SIZE CUSTOMER