THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

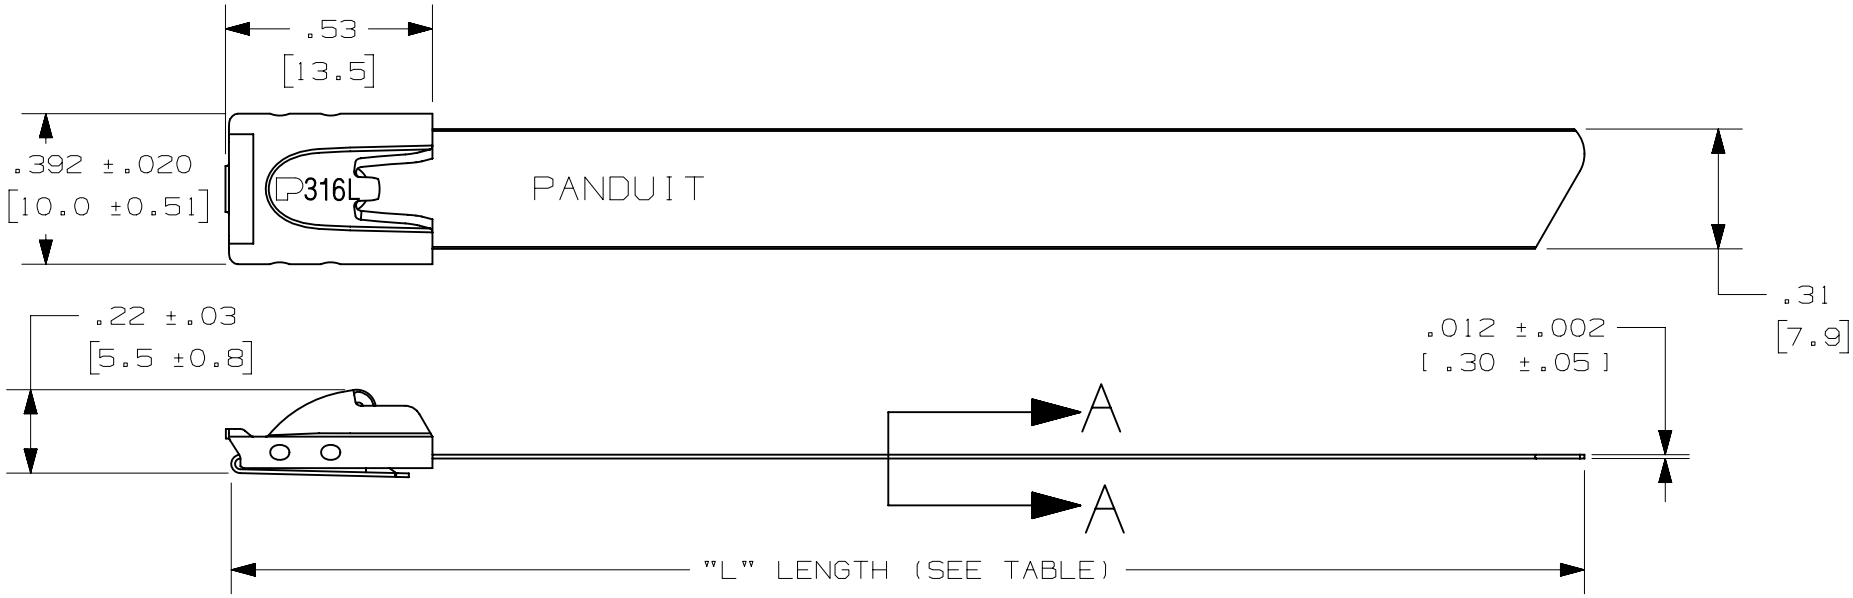

ROUNDED EDGES ALONG STRAP BODY

SECTION A-A
SCALE 4:1

NOTES:

1. APPLICATION TOOLS - GS4MT-E, PPTMT, ST2MT, HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 200 LBS (890 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [ ] DENOTES DIMENSIONS IN MILLIMETERS.
4. TOLERANCES:
   .XXX = ±.010 [.25] .XX = ±.020 [.5]
   .X = ±.030 [.8] ANGLES = ±2°
5. MATERIAL: 316L STAINLESS STEEL

PANDUIT PART NO.	PACKAGE QTY	MAX BUNDLE DIAMETER	LENGTH "L" ±.3 [7]
IMLT51H-L6L	50	2" [51]	7.9" [201]
IMLT69H-L6L	50	2.7" [69]	10.2" [259]
IMLT102H-L6L	50	4" [102]	14.3" [362]
IMLT152H-L6L	50	6" [152]	20.5" [521]
IMLT203H-L6L	50	8" [203]	26.7" [679]
IMLT254H-L6L	50	10" [254]	33.0" [838]
IMLT304H-Q6L	25	12" [304]	39.3" [998]
IMLT355H-Q6L	25	14" [355]	45.5" [1156]

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
04A	2-2-22	JBN	MRJS	JADE	REVISED LENGTH TO 26.7" WAS 26.8" FOR P/N: IMLT203H-L6L REVISED THICKNESS TO .012" WAS .010"	102878/01
03A	7-28-21	JBN	MRJS	JADE	REMOVED GS4MT AND ADDED GS4MT-E APPLICATION TOOLS	102878/00
02	02-11-16	JSUN	JSUN	RGRO	NOTE 5 WAS 316I, WAS CONTROL DRAWING IN TITLE BLOCK	LPECN_15L355BE_DC/02
01	01-28-16	JSUN	JSUN	RGRO	LOOP TENSILE STRENGTH WAS 225 LBS	LPECN_15L355BE_DC/01
00	01-18-16	JSUN	JSUN	RGRO	INITIAL RELEASE	LPECN_15L355BE_DC/00

TITLE
IMLT HEAVY SINGLE LOOP ASSEMBLY 316L STAINLESS STEEL

CUSTOMER DRAWING

ITEM REVISION NAME: 15L355BE/04

DATASET FILE NAME: 15L355BE_DC/04A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .XXX ±
.XX ± ANGLES ±
THIRD ANGLE PROJECTION

MATERIAL: 316L STAINLESS STEEL

DRAWING NUMBER: 15L355BE_DC

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
JSUN	1/16	JSUN	2:1		A

D10100DA/16