

2


1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

- 1. APPLICATION TOOLS - GS4MT-E, PPTMT, ST2MT, HTMT
- 2. MINIMUM LOOP TENSILE STRENGTH - 125 LBS. [556 NEWTONS] WHEN TESTED ON A 1.5" MANDREL.
- 3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS.
- 4. TOLERANCES:
 - .XXX = ±.010 [.25]
 - .XX = ±.02 [.5]
 - .X = ±.03 [.8]
 - ANGLES = ±2°
- 5. MATERIAL: 304 STAINLESS STEEL

PANDUIT PART NO.	MAX BUNDLE DIAMETER	PACKAGE QTY	LENGTH L=±.3 [7]
IMLT25S-C	1" [25]	100	5.0" [127]
IMLT51S-C	2" [51]	100	7.9" [201]
IMLT69S-C	2.7" [69]	100	10.2" [259]
IMLT102S-C	4" [102]	100	14.3" [362]
IMLT152S-C	6" [152]	100	20.5" [521]
IMLT203S-C	8" [203]	100	26.7" [679]
IMLT254S-C	10" [254]	100	33.0" [838]
IMLT304S-Q	12" [304]	25	39.3" [998]
IMLT355S-Q	14" [355]	25	45.5" [1156]
IMLT380S-Q	15" [380]	25	49.2" [1250]

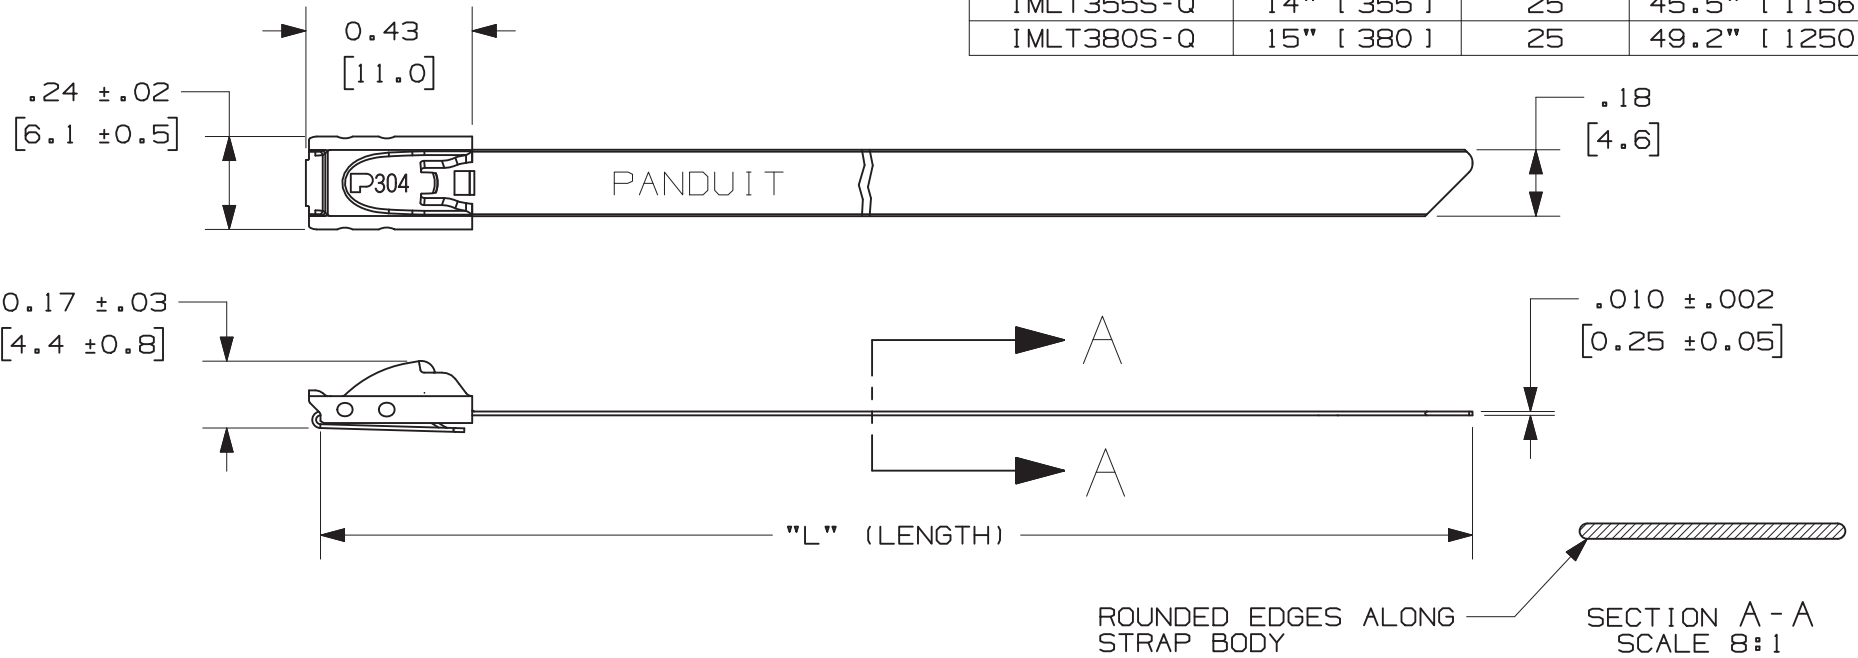

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03A	02/02/22	JBN	MRJS	JADE	REVISED LENGTH TO 26.7" WAS 26.8" FOR P/N: IMLT203S-C	115557
02A	8/3/21	JBN	MRJS	JADE	REMOVED GS4MT AND ADDED GS4MT-E APPLICATION TOOLS	102878
01	1/16	JSUN	JSUN	RGRO	REMOVE A NOTE	LPECN.15L355BB_DC/01
00	1/16	JSUN	SKB	RGRO	INITIAL RELEASE	LPECN.15L355BB_DC/00

TITLE IMLT STANDARD SINGLE LOOP ASSEMBLY 304 STAINLESS STEEL					
CUSTOMER DRAWING					
ITEM REVISION NAME 15L355BB/03			PANDUIT		
DATASET FILE NAME 15L355BB_DC/03A					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]					
.X ±			.XXX ±		
.XX ±			ANGLES ±		
THIRD ANGLE PROJECTION					
DRAWN BY	DATE	CHK	SCALE	DRAWING NUMBER:	
JSUN	1/16	JSUN	N/A	15L355BB_DC	
SHT 1 OF 1					SIZE
					A

2

1

D10100DA/20