


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

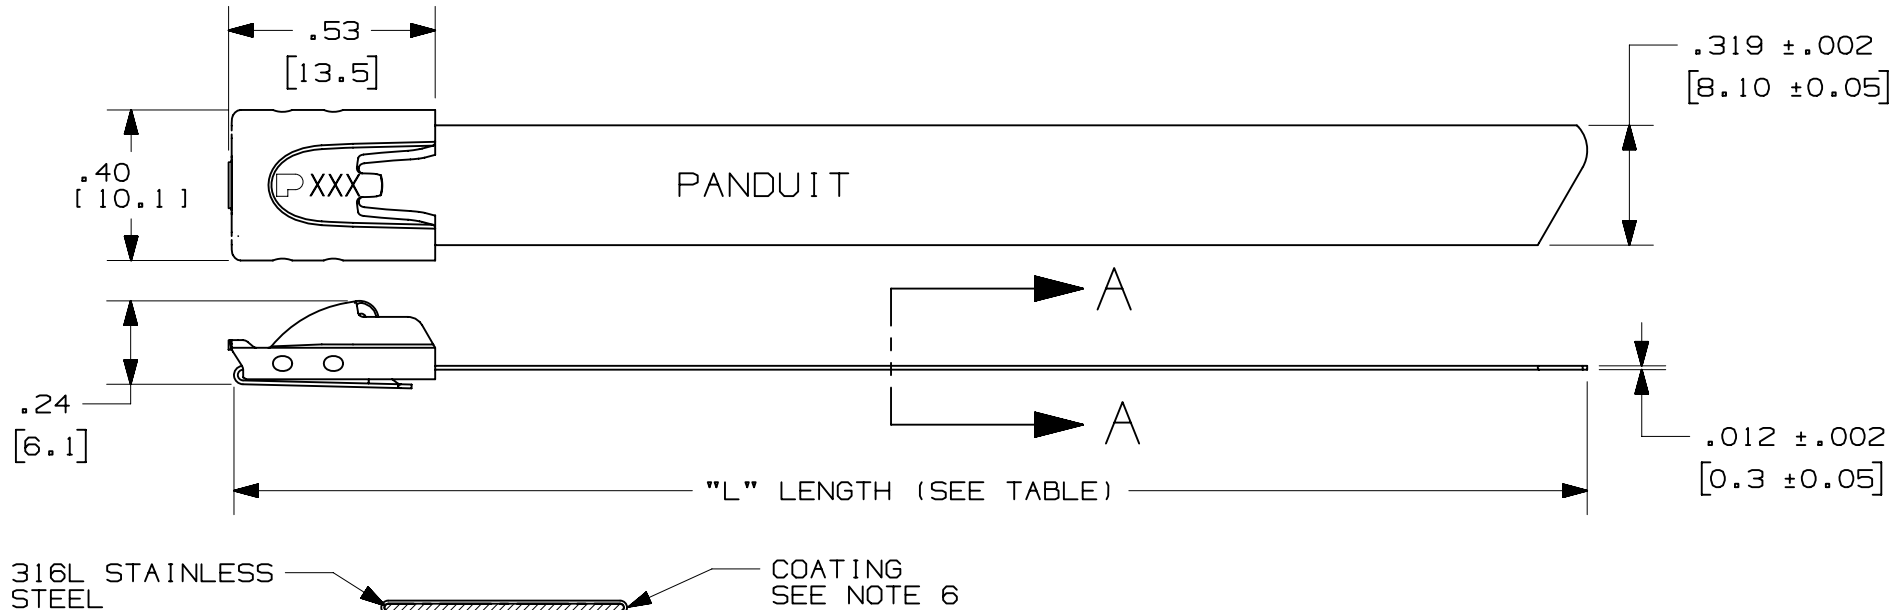

SECTION A-A  
SCALE 4:1

- NOTES:
- APPLICATION TOOLS - GS4MT-E, PPTMT, ST2MT, HTMT, PBTMT
  - MINIMUM LOOP TENSILE STRENGTH - 200 LBS. (890 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
  - BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
  - TOLERANCES:
    - .XXX = ±.010 [ .25 ]
    - .XX = ±.02 [ .5 ]
    - .X = ±.03 [ .8 ]
    - ANGLES = ±2°
  - MATERIAL: 316L STAINLESS STEEL
  - COATING MATERIAL - EPOXY POLYESTER  
COATING THICKNESS: 0.05mm to 0.15mm PER SIDE

PANDUIT PART NO.	MAX BUNDLE DIAMETER	PACKAGE QTY	LENGTH ('L") +/- .3" [ ]
IMLTFC38H-C6L	1.5" [ 38 ]	100	6.2" [ 158 ]
IMLTFC51H-L6L	2" [ 51 ]	50	7.9" [ 201 ]
IMLTFC64H-C6L	2.5" [ 64 ]	100	9.4" [ 233 ]
IMLTFC69H-L6L	2.7" [ 69 ]	50	10.2" [ 259 ]
IMLTFC86H-C6L	3.4" [ 86 ]	100	12.2" [ 310 ]
IMLTFC102H-L6L	4" [ 102 ]	50	14.3" [ 362 ]
IMLTFC137H-C6L	5.4" [ 137 ]	100	18.2" [ 462 ]
IMLTFC152H-L6L	6" [ 152 ]	50	20.5" [ 521 ]
IMLTFC203H-L6L	8" [ 203 ]	50	26.7" [ 679 ]

TITLE  
**IMLT HEAVY FULLY COATED SINGLE LOOP ASSEMBLY**  
**316L STAINLESS STEEL**

CUSTOMER DRAWING

ITEM REVISION NAME

15L355BG/02

DATASET FILE NAME

15L355BG\_DC/02A


UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE: IN [ mm ]

.X ±

.XX ±

.XXX ±

ANGLES ±



THIRD ANGLE  
PROJECTION

MATERIAL:

304 STAINLESS STEEL

DRAWING NUMBER:

15L355BG\_DC

DRAWN BY/DATE

JSUN 3-7-16

CHK

JSUN

SCALE

2:1

SHT 1 OF 1

SIZE

A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	02-02-22	JBN	MRJS	JADE	REVISED LENGTH TO 26.7" WAS 26.8" FOR P/N: IMLT203H-L6L ADDED COATING THICKNESS TO NOTE 6 ADDED SEE NOTE 6 TO SECTION VIEW A-A REVISED THICKNESS TO .012" BASE MATERIAL	115557
01A	8-3-21	JBN	MRJS	JADE	ADDED WIDTH AND THICKNESS DIMENSIONS REMOVED GS4MT AND ADDED GS4MT-E APPLICATION TOOLS	102878
00	3-7-16	JSUN	JSUN	RGRO	INITIAL RELEASE	LPECN_15L355BG_DC/00

**PANDUIT**